

**A Standardized  
Lunar Coordinate System for the  
Lunar Reconnaissance Orbiter**

**LRO Project White Paper  
Version 4  
2008 May 14**

**Previous Versions:  
Version 1: 2006 August 23  
Version 2: 2007 January 24  
Version 3: 2008 January 30**



**National Aeronautics and  
Space Administration**

---

**Goddard Space Flight Center  
Greenbelt, Maryland**

---



1.0 PURPOSE.....	4
2.0 JUSTIFICATION FOR A STANDARDIZED SYSTEM.....	4
3.0 PROCESS FOR REACHING CONSENSUS ON LUNAR COORDINATE SYSTEM .....	4
4.0 LUNAR COORDINATE SYSTEM SELECTION CRITERIA.....	5
5.0 PLANETOCENTRIC COORDINATES .....	5
5.1 RADIUS .....	5
6.0 LUNAR FIXED REFERENCE FRAME.....	5
6.1 MEAN EARTH / POLAR AXIS LUNAR REFERENCE SYSTEM .....	6
6.2 PRINCIPAL AXIS LUNAR REFERENCE SYSTEM .....	7
7.0 IMPLEMENTATION .....	7
8.0 IMPROVEMENTS IN THE LUNAR REFERENCE SYSTEM .....	7
9.0 SUMMARY.....	9
APPENDIX A. REFERENCES.....	10
APPENDIX B. ACRONYMS .....	11

## **1.0 PURPOSE**

The purpose of this White Paper is to provide a summary on the planned Lunar Coordinate System that will be used for the Lunar Reconnaissance Orbiter (LRO) mission for operational targeting, interdisciplinary science, and communication among future and ongoing US and international lunar missions. The same system will be used for all LRO data products archived in the Planetary Data System (PDS).

## **2.0 JUSTIFICATION FOR A STANDARDIZED SYSTEM**

The use of a common Lunar Coordinate System for LRO is important for a number of reasons. Simply stated, having only one system eliminates potential confusion among members of the LRO team as well as the extended data user community. For operations, this will enable LRO scientists and mission planners to communicate clearly and effectively through unambiguous identification of the geographic locations of lunar landforms and observation targets. Researchers interested in obtaining LRO archival data from the PDS in order to generate higher level products will not have to contend with conversions among systems when registering multiple data layers if the input data are all in the same system. Additionally, the use of one system simplifies the conversion process by minimizing the total number of conversions required to register data from other missions using different systems. The anticipated intensive use of LRO data products for landing site selection and advanced mission planning by the Lunar Precursor Robotics Program (LPRP) and Exploration Systems Mission Directorate (ESMD) further underscores the need for a common, unambiguous reference system for the Moon on which to base future Exploration, habitation, and *in situ* resource utilization. Adoption of a standardized system for LRO does not preclude conversion to or use of different systems for specific applications where necessary and appropriate.

## **3.0 PROCESS FOR REACHING CONSENSUS ON LUNAR COORDINATE SYSTEM**

From April through July of 2006 a series of meetings and bi-weekly telecons was held and a consensus was reached on the Lunar Coordinate System for LRO. Specific discussions on defining a common Lunar Coordinate System were made integral to the agendas of the Project Science Working Group (PSWG) and the LRO Data Working Group (LDWG). The membership of the LDWG was augmented by individuals with specific, relevant expertise for the purposes of defining a standard Lunar Coordinate System. The widest possible participation from key stakeholders was solicited in order to represent all opinions and arrive at the best possible decision. Key participants were as follows:

- LRO Project as represented by the LRO Project Scientist, LRO Deputy Project Scientist, the LDWG lead, and additional members of the PSWG and LDWG
- LRO Instrument PIs, their representatives and team members
- Brent Archinal (U.S. Geological Survey - Flagstaff), Vice-Chair of the International Astronomical Union (IAU) and International Association of Geodesy (IAG) Working Group on Cartographic Coordinates and Rotational Elements of the Planets and Satellites
- Charles Acton (Navigation and Ancillary Information Facility (NAIF) PDS support node)

Meeting minutes from the LDWG have recorded the discussions and the details of the process leading to selection of the specific coordinate and reference systems for LRO. The LDWG lead wrote a draft description of the LRO lunar coordinates approach and submitted this to Dr. Brent Archinal of the U.S. Geological Survey at Flagstaff for review. Dr. Archinal ensured that the description was technically correct and consistent. The LDWG lead sent the description to all key participants on June 26, 2006 for review and comment.

## 4.0 LUNAR COORDINATE SYSTEM SELECTION CRITERIA

Members of the LDWG and PSWG worked to define a common Lunar Coordinate System for the LRO mission. A consensus was reached that planetocentric coordinates should be used and that the selected Lunar Coordinate System should be compatible with the one used within the PDS for Clementine data. Working group members strongly advocated adoption of a system that would meet several specific criteria:

- Straightforward conversion to and from other systems that might be used within the LRO Instrument Science Operations Centers (SOC) or for other specific applications
- Commonality with or ease of translation to and from systems used in previous missions
- Adherence to conventions and standards recommended by the IAU / IAG and adopted for use by the PDS in consultation with the NASA Planetary Cartography Working Group (PCWG)

The approach that was adopted meets all of the above criteria. Use of this system is recommended by the 2000 and 2003 IAU/IAG Working Group on Cartographic Coordinates and Rotational Elements of the Planets and Satellites. There is a strong push within the planetary community to adopt this system wherever possible.

## 5.0 PLANETOCENTRIC COORDINATES

For the LRO mission, planetocentric coordinates will be used. This approach, together with Cartesian coordinates, is now used in most planetary computations. These are right-handed spherical coordinates where the  $z$ -axis is the mean axis of rotation and the  $x$ -axis is the intersection of the Equator and the Prime Meridian. The  $x$ -axis is normal to the  $z$ -axis through the origin of the system, which is the Moon's center of mass. The  $y$ -axis is orthogonal to the  $x$ - and  $z$ -axes. Latitude is the angle between a line extending from the origin to the planetary equator and a vector from the origin to the point of interest. Longitude is the angle between this vector and the plane of the Prime Meridian measured in an eastern direction. Radius is the distance from Moon's center of mass to the point of interest.

Planetocentric coordinates are illustrated in Figure 1 on Page 5.

### 5.1 RADIUS

Where possible, Radius should be expressed as the total distance from the Moon's center of mass to the point of interest. If necessary, for example for avoiding round-off error in a large digital terrain model in 4 byte format, the distance of a point from the Moon's center of mass can be expressed as the distance along the radius vector above (positive) or below (negative) a reference sphere of radius 1737.4 km (the Report of the IAU/IAG Working Group on Cartographic Coordinates and Rotational Elements 2000 value). The given reference sphere radius should be used until some updated value is accepted internationally, for example following the LRO mission.

## 6.0 LUNAR FIXED REFERENCE FRAME

Two slightly different reference systems are commonly used to orient the lunar body-fixed coordinate system. One is the Mean Earth/Polar Axis (ME) system that will be used at all times for PDS archival products. The other is the axis of figure system, also called the Principal Axis (PA) system, which may be used internally to the SOCs and LRO instrument teams for specific applications. These reference systems are described below.

## 6.1 MEAN EARTH / POLAR AXIS LUNAR REFERENCE SYSTEM

The Mean Earth/Polar Axis (ME) system defines the z-axis as the mean rotational pole. The Prime Meridian ( $0^\circ$  Longitude) is defined by the mean Earth direction.

The intersection of the lunar Equator and Prime Meridian occurs at what can be called the Moon's "mean sub-Earth point". The concept of a lunar "sub-Earth point" derives from the fact that the Moon's rotation is tidally locked to the Earth. The actual sub-Earth point on the Moon varies slightly due to orbital eccentricity, inclination, and other factors. So a "mean sub-Earth point" is used to define the point on the lunar surface where Longitude equals  $0^\circ$ . This point does not coincide with any prominent crater or other lunar surface feature.

***LRO instrument teams shall deliver data to the PDS with planetocentric coordinates in the ME system only.*** This is consistent with heritage PDS datasets like those from Clementine. Using coordinates in the ME system is consistent with the recommendations of the IAU/IAG Working Group on Cartographic Coordinates and Rotational Elements of the Planets and Satellites.

***The ME system with planetocentric coordinates shall also be adopted by the LRO Project and instrument teams for the purposes of operations planning, observational targeting, geographic identification of lunar landforms, and inter-mission communications.***

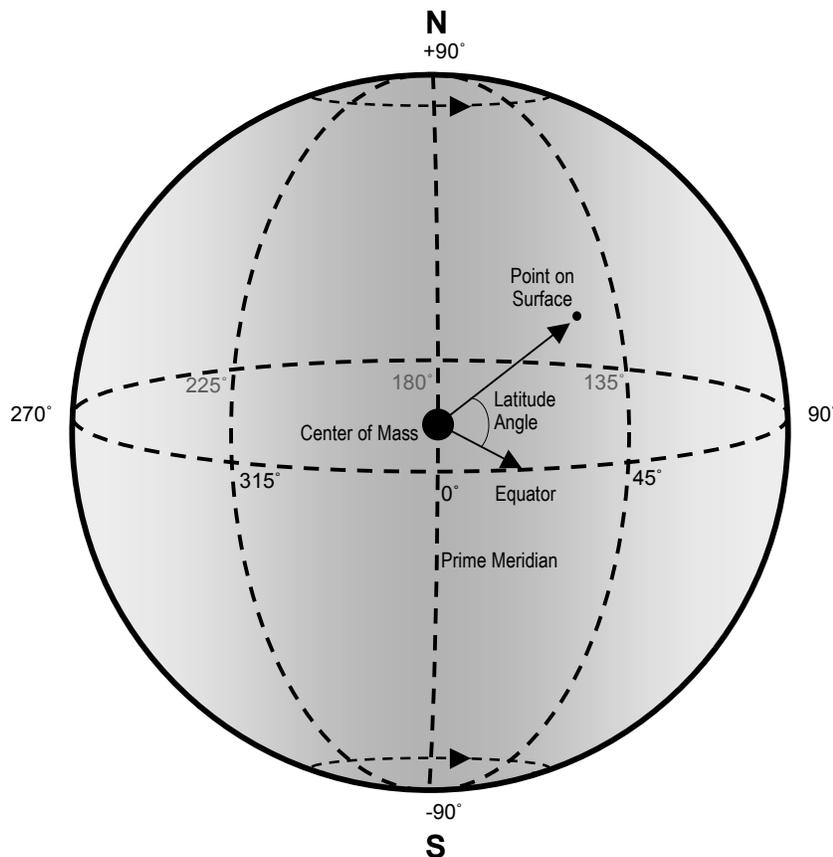


Figure 1. Planetocentric coordinates are expressed as right-handed coordinates with the origin at the center of mass of the body.

Planetocentric Longitude is measured from the Prime Meridian (0° Longitude) toward the East (to the right), in the direction of rotation for a prograde body, with the Longitude values increasing from 0° toward 360°. Conversion to lunar map and image products that use the planetocentric ME system with the +180° East / -180° West convention is easily performed with the appropriate arithmetic.

Planetocentric Latitude is the angle between the equatorial plane and a vector from the center of mass to the point on the surface. Planetocentric Latitude is measured from 0° at the Equator to 90° at either pole, and is defined as positive in the northern hemisphere and negative in the southern hemisphere. Planetocentric North is in the hemisphere of the north pole of the Ecliptic.

## **6.2 PRINCIPAL AXIS LUNAR REFERENCE SYSTEM**

The Principal Axis (PA) system is a lunar body-fixed rotating coordinate system whose axes are defined by the principal axes of the Moon. Due to the fact that the Moon is not truly a synchronously rotating triaxial ellipsoid, the PA and ME rotation axes do not coincide. The axes of the two systems differ by about 1 km at the lunar surface.

The PA coordinate system is especially useful for dynamical studies in areas such as gravity field determination and lunar laser ranging (LLR). LRO instrument teams may use either the ME or PA reference systems internally. However, data will be delivered to the PDS with coordinates in the ME system only.

Data for any epoch can be oriented into the PA system by using the current Jet Propulsion Laboratory (JPL) ephemeris, referred to as a Developmental Ephemeris (DE). DE421 is the ephemeris selected by the LRO Data Working Group (LDWG) for the LRO mission at the time of this writing, but the LDWG could adopt a successor DE for the LRO mission in the future. Data can be oriented into the ME system by applying the rotational difference to that system appropriate to the given ephemeris. Data can also be oriented to these systems by directly tying the data to previously established reference frames in the given system (e.g., LLR or image-based reference frames in either system).

## **7.0 IMPLEMENTATION**

The PDS NAIF support node at JPL maintains SPICE (Spacecraft, Planet, Instruments, C-matrix, and Events) data to support use of the two lunar reference systems. NAIF provides SPICE DE-based binary lunar planetary constants kernels (PcK) using planetocentric coordinates and SPICE frame specification kernels (FK). The FKs provide definitions of the NAIF frames, NAIF frame names to be used within SPICE software, and matrices to be used to rotate between the PA system and the ME system. The binary PcK files are useful only with SPICE Toolkit software. The FK files are provided for use with SPICE Toolkit software, but since these are simple ASCII files, the rotation matrices can be extracted from them for use in another context. Detailed information about the frames and the use of the PcK and FK files is found within the files themselves. More information about the SPICE system, including a number of tutorials can be obtained from the NAIF website:

<http://naif.jpl.nasa.gov/naif/pds.html>.

## **8.0 IMPROVEMENTS IN THE LUNAR REFERENCE SYSTEM**

The parameters that presently define the reference system and enable the coordinates of surface features to be determined are expected to undergo improvement, some significantly, during the LRO mission as a result of the measurements and observations LRO is expected to acquire. These measurements, coupled with a precise spacecraft trajectory will, at the conclusion of the LRO mission, provide a detailed global framework upon which all LRO and previous lunar observations can be

placed. The parameters describing the reference frame and coordinate system will be updated at least once during the early- to mid-phases of the LRO mission, and also at the end of the baseline mission. The improved values can be expected to change the coordinates of lunar features at the kilometer level.

## **9.0 SUMMARY**

On June 26, 2006 the LDWG lead sent a summary description of the LRO coordinate system agreement to the LRO PIs, SOCs, PDS, and the U.S. Geological Survey at Flagstaff for review and concurrence. The summary was received positively, and the LRO Project concurs with the approach based upon the open and fully documented process, the technical review and description of the selected system, and the consensus that the process has resulted in the selection of the appropriate Lunar Coordinate System for LRO. The LRO coordinate system approach as described in this document is summarized as follows:

- For PDS archival products, operations planning, observational targeting, geographic identification of lunar landforms, and inter-mission communications, the Mean Earth / Polar Axis (ME) lunar reference system shall be used, with geographic locations of surface features expressed in planetocentric coordinates
- For specific applications internal to the SOCs or elsewhere, the Principal Axis (PA) lunar reference system may be employed. All SOC products to be archived in the PDS must be converted to the ME system prior to transmission to the PDS

A detailed Lunar Constants Table will be developed for the LRO mission at a to-be-determined date. This table will provide the mission-specific parameters and conventions that will be applied for the conduct of the LRO mission and for the analysis of LRO data. References listed in Appendix A will be consulted in the development of the mission-specific table.

## **APPENDIX A. REFERENCES**

Report of the IAU/IAG Working Group on Cartographic Coordinates and Rotational Elements of the Planets and Satellites: 2003, P. K. Seidelmann, B. A. Archinal, et al, 2004

Report of the IAU/IAG Working Group on Cartographic Coordinates and Rotational Elements of the Planets and Satellites: 2000, P. K. Seidelmann, V. K. Abalakin, et al, 2001

Lunar Constants and Models Document, R. B. Roncoli, JPL Technical Document D-32296, 2005

PDS Standards Reference, Version 3.7, 2006, <http://pds.jpl.nasa.gov/documents/sr/>

PDS Navigation and Ancillary Information Facility, <http://naif.jpl.nasa.gov/naif/pds.html>

## APPENDIX B. ACRONYMS

DE	Developmental Ephemeris
ESMD	Exploration Systems Mission Directorate
FK	Frame Specification Kernels
IAG	International Association of Geodesy
IAU	International Astronomical Union
JPL	Jet Propulsion Laboratory
LDWG	LRO Data Working Group
LLR	Lunar Laser Ranging
LPRP	Lunar Precursor and Robotics Program
LRO	Lunar Reconnaissance Orbiter
ME	Mean Earth/Polar Axis
NAIF	Navigation and Ancillary Information Facility
PA	Principal Axis
PcK	Planetary Constants Kernels
PCWG	Planetary Cartography Working Group
PDS	Planetary Data System
PI	Principal Investigator
PSWG	Project Science Working Group
SOC	Science Operations Center
SPICE	Spacecraft, Planet, Instruments, C-matrix, and Events